


## Three-Terminal Positive Voltage Regulator

### KA180O08

#### ■ Features

- Maximum Output current  $I_o$ : 0.1A
- Output Voltage  $V_o$ : 8V
- Continuous Total Dissipation  $P_D$ : 0.5W ( $T_a = 25^\circ C$ )
- Marking Code: KL08

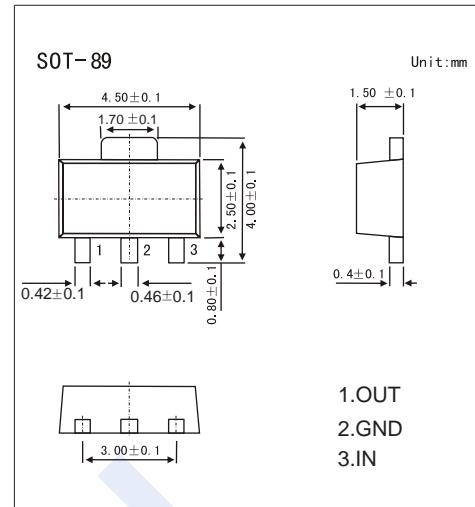


#### ■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

| Parameter                            | Symbol    | Rating     | Unit |
|--------------------------------------|-----------|------------|------|
| Input Voltage                        | $V_I$     | 30         | V    |
| Operating Junction Temperature Range | $T_{OPR}$ | -55 ~ +125 | °C   |
| Storage Temperature Range            | $T_{STG}$ | -55 ~ +150 | °C   |

#### ■ Electrical Characteristics ( $V_I=14V$ , $I_o=40mA$ , $C_I=0.33\mu F$ , $C_O=0.1\mu F$ , unless otherwise specified)

| Parameter                | Symbol       | Test conditions  | Min | Typ | Max | Unit |
|--------------------------|--------------|--|-----|-----|-----|------|
| Output Voltage           | $V_o$        | $T_J = 25^\circ C$   | 7.7 | 8.0 | 8.3 | V    |
|                          |              | $T_J = 0 \sim 125^\circ C$ , $10.5V \leq V_I \leq 23V$ , $I_o=1mA \sim 40mA$ | 7.6 | 8.0 | 8.4 | V    |
|                          |              | $T_J = 0 \sim 125^\circ C$ , $I_o=1mA \sim 70mA$                             | 7.6 | 8.0 | 8.4 | V    |
| Load Regulation          | $\Delta V_o$ | $T_J = 25^\circ C$ , $I_o=1mA \sim 100mA$                                    | 18  | 80  | 80  | mV   |
|                          |              | $T_J = 25^\circ C$ , $I_o=1mA \sim 40mA$                                     | 10  | 40  | 40  | mV   |
| Line Regulation          | $\Delta V_o$ | $T_J = 25^\circ C$ , $10.5V \leq V_I \leq 23V$                               | 42  | 175 | 175 | mV   |
|                          |              | $T_J = 25^\circ C$ , $11V \leq V_I \leq 23V$                                 | 36  | 125 | 125 | mV   |
| Quiescent Current        | $I_Q$        | $T_J = 25^\circ C$   | 4   | 6   | 6   | mA   |
| Quiescent current Change | $\Delta I_Q$ | $T_J = 0 \sim 125^\circ C$ , $11V \leq V_I \leq 23V$                         |     | 1.5 | 1.5 | mA   |
|                          |              | $T_J = 0 \sim 125^\circ C$ , $1mA \leq I_o \leq 40mA$                        |     | 0.1 | 0.1 | mA   |
| Output Noise Voltage     | $V_N$        | $T_J = 25^\circ C$ , $10Hz \leq f \leq 100KHz$                               | 54  |     |     | μV   |
| Ripple Rejection         | $RR$         | $T_J = 0 \sim 125^\circ C$ , $13V \leq V_I \leq 23V$ , $f = 120Hz$           | 37  | 46  |     | dB   |
| Dropout Voltage          | $V_D$        | $T_J = 25^\circ C$   |     | 1.7 |     | V    |

#### ■ Typical Application

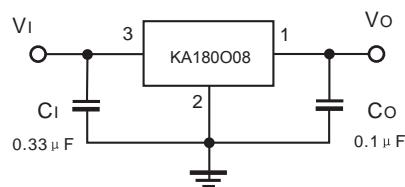

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

**KA180O08**

## ■ Typical Characteristics

