


MOS Field Effect Transistor

2SK3385

■ Features

- Low on-resistance
 $R_{DS(on)1} = 28 \text{ m}\Omega$ MAX. ($V_{GS} = 10 \text{ V}$, $I_D = 15 \text{ A}$)
 $R_{DS(on)2} = 45 \text{ m}\Omega$ MAX. ($V_{GS} = 4.0 \text{ V}$, $I_D = 15 \text{ A}$)
- Low C_{iss} : $C_{iss} = 1500 \text{ pF TYP.}$
- Built-in gate protection diode

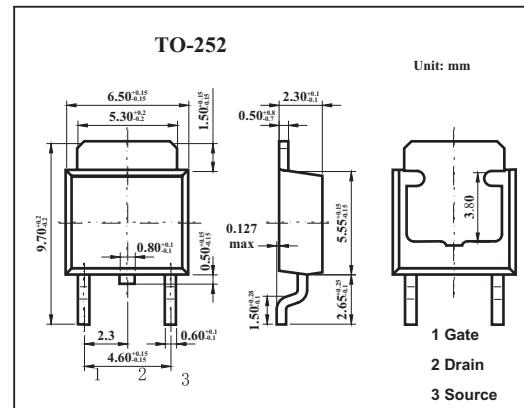

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Drain to source voltage	V_{DSS}	60	V
Gate to source voltage	V_{GSS}	± 20	V
Drain current	I_D	± 30	A
	I_{Dp}^*	± 100	A
Power dissipation $T_c=25^\circ\text{C}$ $T_a=25^\circ\text{C}$	P_D	36	W
		1.0	
Channel temperature	T_{ch}	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

* $PW \leq 10 \mu\text{s}$, Duty Cycle $\leq 1\%$

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Drain cut-off current	I_{DSS}	$V_{DS}=60\text{V}, V_{GS}=0$			10	μA
Gate leakage current	I_{GSS}	$V_{GS}=\pm 20\text{V}, V_{DS}=0$			± 10	μA
Gat cutoff voltage	$V_{GS(off)}$	$V_{DS}=10\text{V}, I_D=1\text{mA}$	1.5	2.0	2.5	V
Forward transfer admittance	$ Y_{fs} $	$V_{DS}=10\text{V}, I_D=15\text{A}$	8	16		S
Drain to source on-state resistance	$R_{DS(on)1}$	$V_{GS}=10\text{V}, I_D=15\text{A}$		22	28	$\text{m}\Omega$
	$R_{DS(on)2}$	$V_{GS}=4.0\text{V}, I_D=15\text{A}$		31	45	$\text{m}\Omega$
Input capacitance	C_{iss}			1500		pF
Output capacitance	C_{oss}	$V_{DS}=10\text{V}, V_{GS}=0, f=1\text{MHz}$		250		pF
Reverse transfer capacitance	C_{rss}			130		pF
Turn-on delay time	t_{on}			22		ns
Rise time	t_r	$I_D=15\text{A}, V_{GS(on)}=10\text{V}, R_G=10\Omega, V_{DD}=30\text{V}$		250		ns
Turn-off delay time	t_{off}			77		ns
Fall time	t_f			77		ns
Total Gate Charge	Q_G			30		nC
Gate to Source Charge	Q_{GS}	$I_D = 30 \text{ A}, V_{DD} = 48 \text{ V}, V_{GS} = 10 \text{ V}$		4.8		nC
Gate to Drain Charge	Q_{GD}			8.6		nC