
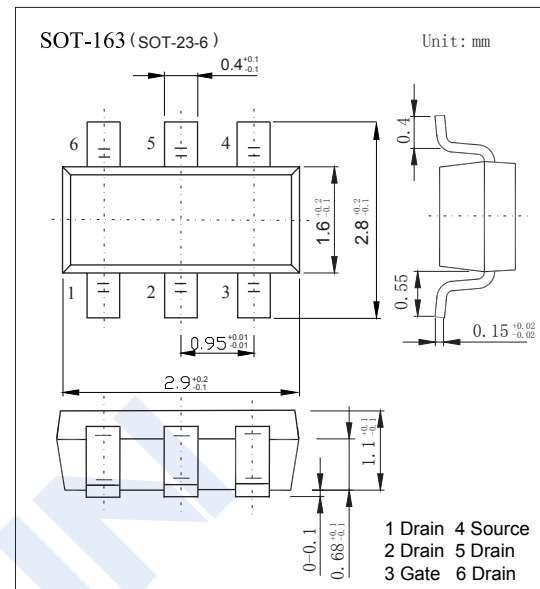


N-Channel MOSFET

AO6400 (KO6400)

■ Features

- $V_{DS} (V) = 30V$
- $I_D = 6.9 A (V_{GS} = 10V)$
- $R_{DS(ON)} < 28m\Omega (V_{GS} = 10V)$
- $R_{DS(ON)} < 33m\Omega (V_{GS} = 4.5V)$
- $R_{DS(ON)} < 52m\Omega (V_{GS} = 2.5V)$



■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 12	
Continuous Drain Current	I_D	$T_A=25^\circ C$	A
		$T_A=70^\circ C$	
Pulsed Drain Current	I_{DM}	35	
Power Dissipation	P_D	$T_A=25^\circ C$	W
		$T_A=70^\circ C$	
Thermal Resistance.Junction- to-Ambient	R_{thJA}	$t \leq 10s$	$^\circ C/W$
		Steady-State	
Thermal Resistance.Junction- to-Lead	R_{thJL}	50	
Junction Temperature	T_J	150	$^\circ C$
Storage Temperature Range	T_{stg}	-55 to 150	

N-Channel MOSFET

AO6400 (KO6400)

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V _{DSS}	I _D =250 μA, V _{GS} =0V	30			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =30V, V _{GS} =0V			1	μA
		V _{DS} =30V, V _{GS} =0V, T _J =55°C			5	
Gate-Body Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±12V			±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250 μA	0.65		1.45	V
Static Drain-Source On-Resistance	R _{DS(on)}	V _{GS} =10V, I _D =6.9A			28	mΩ
		V _{GS} =10V, I _D =6.9A, T _J =125°C			39	
		V _{GS} =4.5V, I _D =6A			33	
		V _{GS} =2.5V, I _D =5A			52	
On State Drain Current	I _{D(ON)}	V _{GS} =4.5V, V _{DS} =5V	35			A
Forward Transconductance	g _{FS}	V _{DS} =5V, I _D =6.9A		33		S
Input Capacitance	C _{iss}	V _{GS} =0V, V _{DS} =15V, f=1MHz		630		pF
Output Capacitance	C _{oss}			75		
Reverse Transfer Capacitance	C _{rss}			50		
Gate Resistance	R _g	V _{GS} =0V, V _{DS} =0V, f=1MHz	1.5		4.5	Ω
Total Gate Charge	Q _g	V _{GS} =4.5V, V _{DS} =15V, I _D =6.9A		6	7	nC
Gate Source Charge	Q _{gs}			1.3		
Gate Drain Charge	Q _{gd}			1.8		
Turn-On DelayTime	t _{d(on)}	V _{GS} =10V, V _{DS} =15V, R _L =2.2 Ω, R _G =3 Ω		3		ns
Turn-On Rise Time	t _r			2.5		
Turn-Off DelayTime	t _{d(off)}			25		
Turn-Off Fall Time	t _f			4		
Body Diode Reverse Recovery Time	t _{rr}	I _F = 6.9A, di/dt= 100A/us		8.5		nA
Body Diode Reverse Recovery Charge	Q _{rr}			2.6		
Maximum Body-Diode Continuous Current	I _S				2	A
Diode Forward Voltage	V _{SD}	I _S =1A, V _{GS} =0V			1	V

* The static characteristics in Figures 1 to 6 are obtained using <300us pulses, duty cycle 0.5% max.

■ Marking

Marking	D0**
---------	------

N-Channel MOSFET AO6400 (KO6400)

■ Typical Characteristics

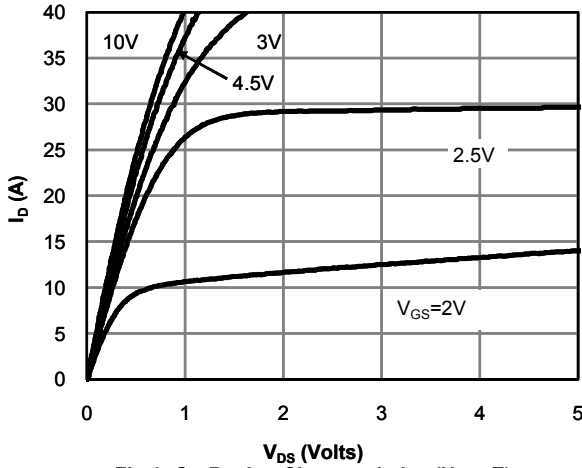


Fig 1: On-Region Characteristics (Note E)

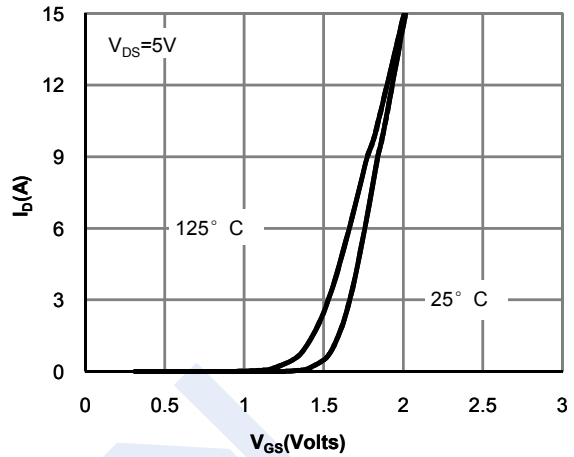


Figure 2: Transfer Characteristics (Note E)

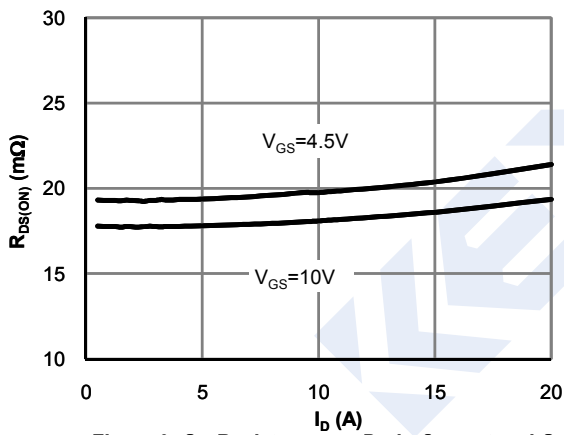


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

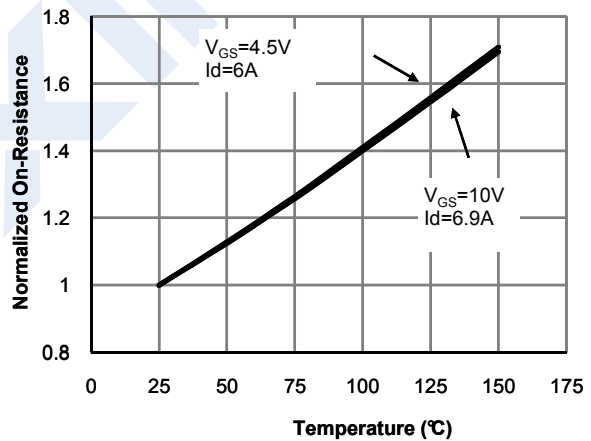


Figure 4: On-Resistance vs. Junction Temperature (Note E)

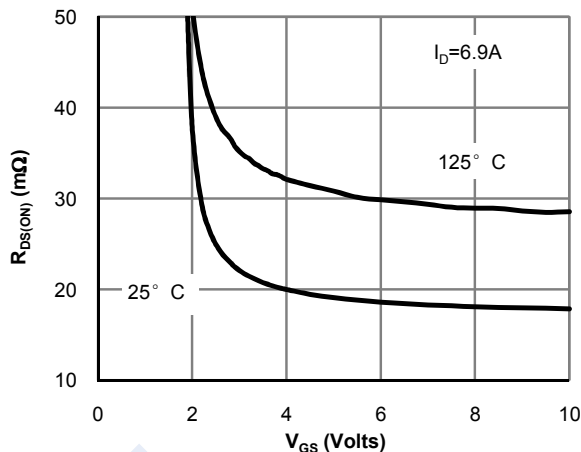


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

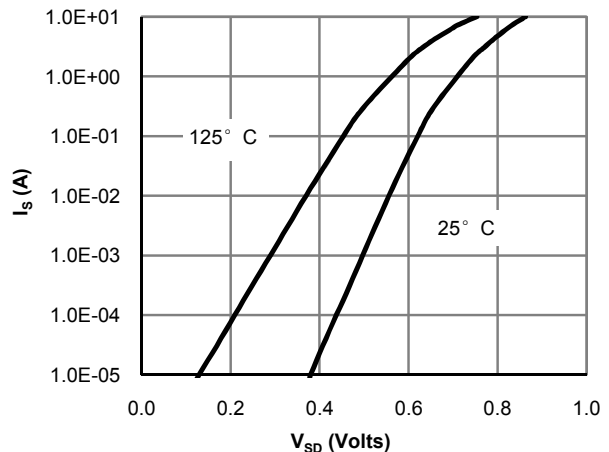


Figure 6: Body-Diode Characteristics (Note E)

N-Channel MOSFET AO6400 (KO6400)

■ Typical Characteristics

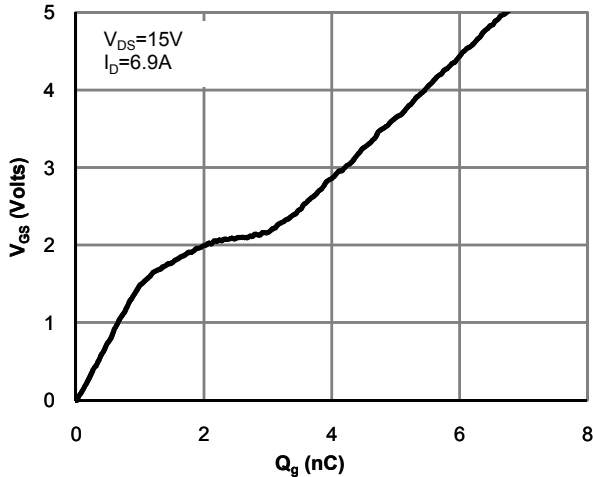


Figure 7: Gate-Charge Characteristics

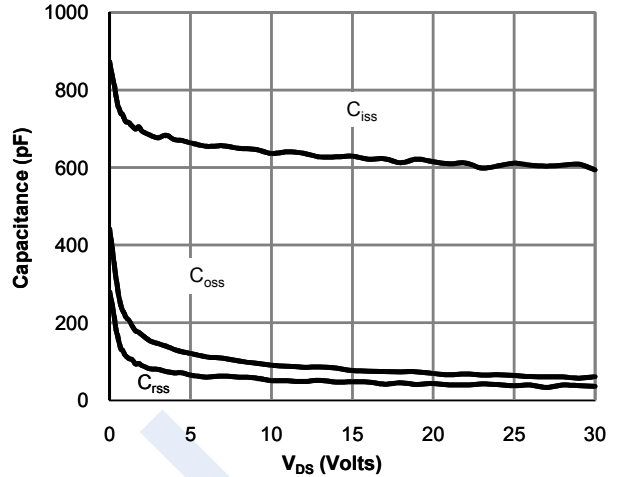


Figure 8: Capacitance Characteristics

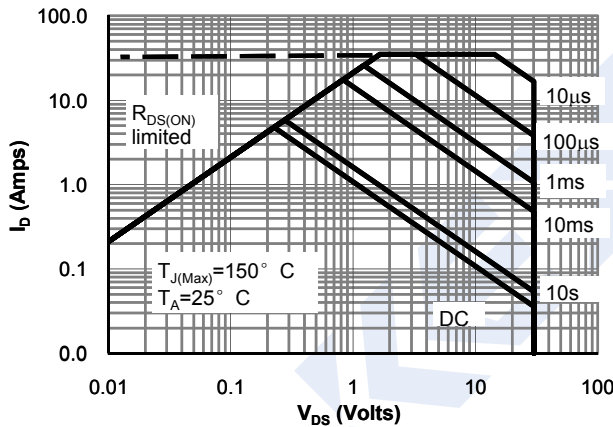


Figure 9: Maximum Forward Biased Safe Operating Area (Note F)

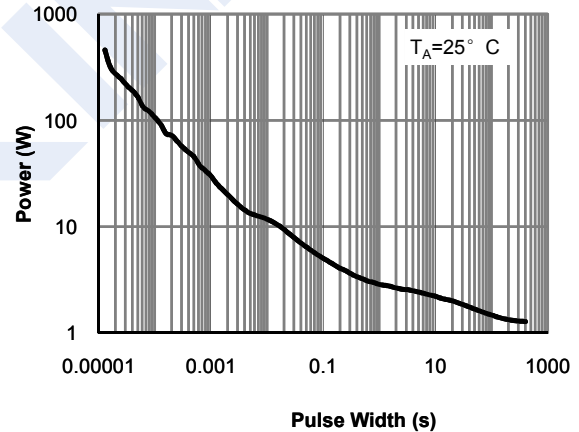


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note F)

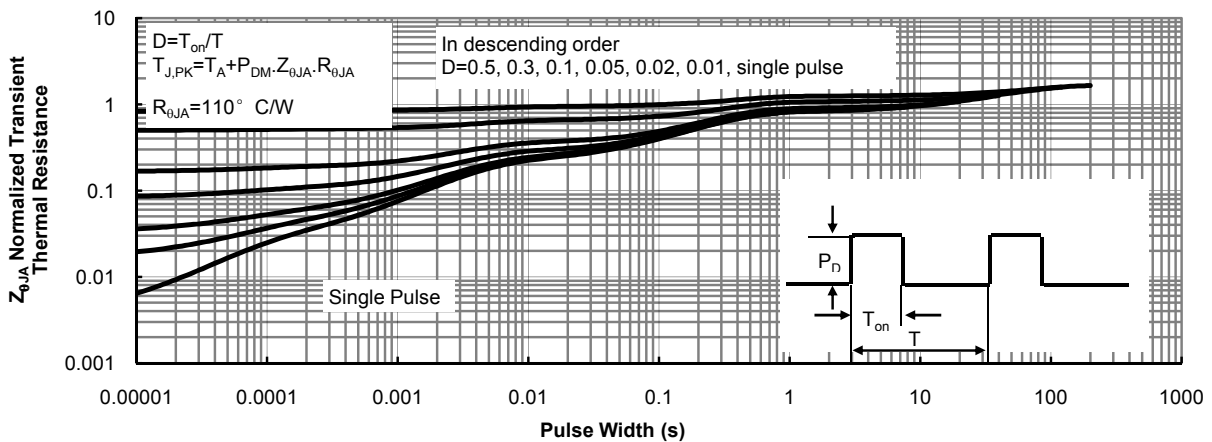


Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)