


Three-Terminal Positive Voltage Regulator

LM78L08

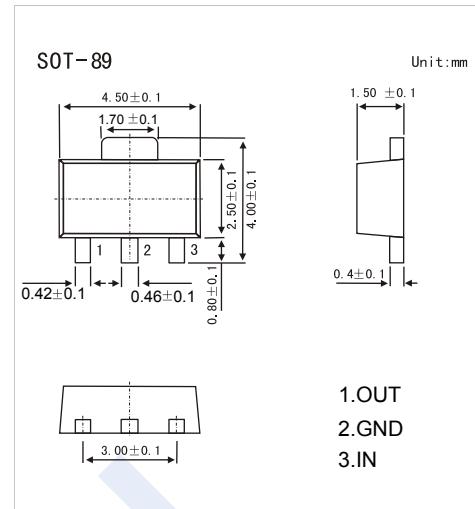

■ Features

- Maximum Output current I_o : 0.1A
- Output Voltage V_o : 8V
- Continuous Total Dissipation P_D : 0.5W ($T_a = 25^\circ C$)


■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Rating	Unit
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	-55 ~ +125	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C

■ Electrical Characteristics ($V_I=14V$, $I_o=40mA$, $C_I=0.33\mu F$, $C_O=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_J = 25^\circ C$	7.7	8.0	8.3	V
		$T_J = 0 \sim 125^\circ C$, $10.5V \leq V_I \leq 23V$, $I_o = 1mA \sim 40mA$	7.6	8.0	8.4	V
		$T_J = 0 \sim 125^\circ C$, $I_o = 1mA \sim 70mA$	7.6	8.0	8.4	V
Load Regulation	ΔV_o	$T_J = 25^\circ C$, $I_o = 1mA \sim 100mA$		18	80	mV
		$T_J = 25^\circ C$, $I_o = 1mA \sim 40mA$		10	40	mV
Line Regulation	ΔV_o	$T_J = 25^\circ C$, $10.5V \leq V_I \leq 23V$		42	175	mV
		$T_J = 25^\circ C$, $11V \leq V_I \leq 23V$		36	125	mV
Quiescent Current	I_Q	$T_J = 25^\circ C$	4	6		mA
Quiescent current Change	ΔI_Q	$T_J = 0 \sim 125^\circ C$, $11V \leq V_I \leq 23V$			1.5	mA
		$T_J = 0 \sim 125^\circ C$, $1mA \leq I_o \leq 40mA$			0.1	
Output Noise Voltage	V_N	$T_J = 25^\circ C$, $10Hz \leq f \leq 100KHz$		54		μV
Ripple Rejection	RR	$T_J = 0 \sim 125^\circ C$, $13V \leq V_I \leq 23V$, $f = 120Hz$	37	46		dB
Dropout Voltage	V_D	$T_J = 25^\circ C$			1.7	V


■ Typical Application

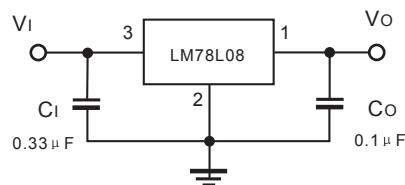


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

LM78L08


■ Typical Characteristics

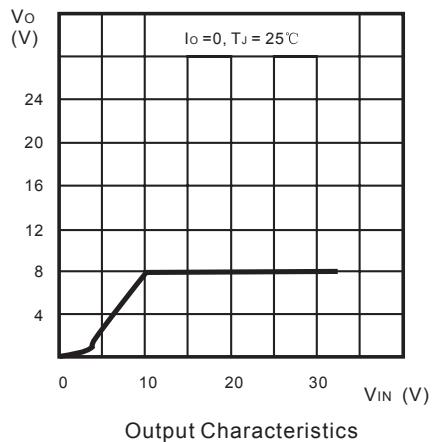


Output Characteristics

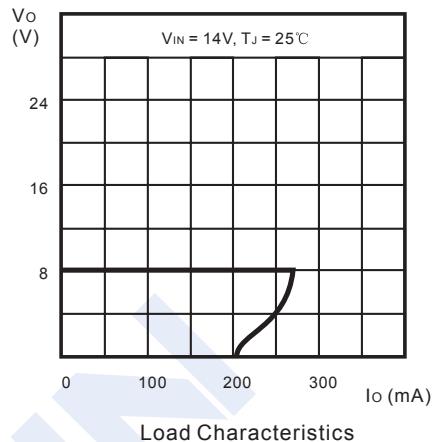


Load Characteristics

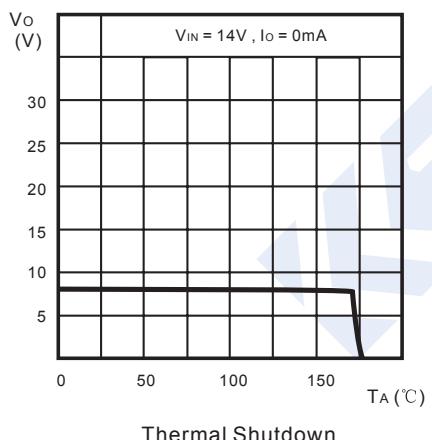

Thermal Shutdown

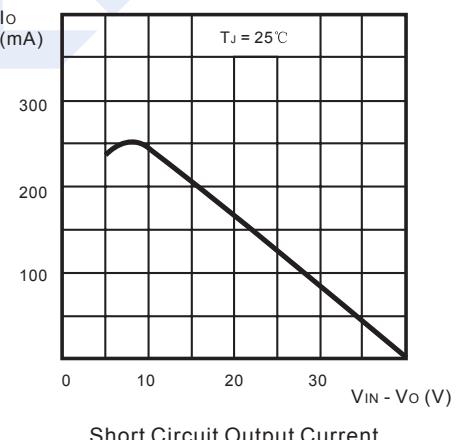

Short Circuit Output Current

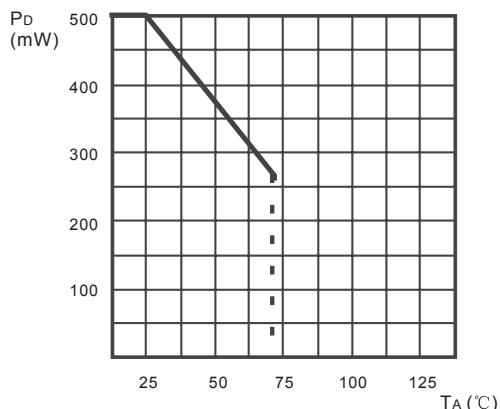

Power Dissipation vs. Ambient Temperature